



Technical Data Sheet Photolink-Fiber Optic Transmitting DLT1112A

Features

- High speed signal transmission
(16Mbps, NRZ signal)
- Input TTL compatible
- +3~+5V power source


Descriptions

The light transmitting unit is a standard-package product with connector and opto-electric component packaged with LED and drive IC. The function of unit changes the electric signal into light signal and be transmitted by plastic fiber.

The unit is operated at single+3V~ +5V and the input signal is TTL compatible. The DLT1112A has a maximum operating speed of 16 Mbps. The light signal is coupled into plastic fiber by connector. The unit has high performance at low dissipation current, steady light output and efficient light coupling.

Applications

- Audio equipment
- DVD player
- PC, Notebook
- Sound card

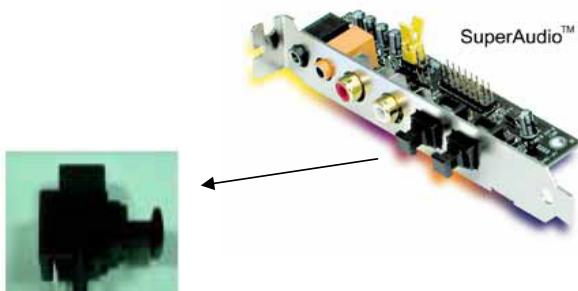

Device Selection Guide


| Chip | | Operating Voltage (Vcc) | Dissipation Current(mA) | Fiber Coupling Light Output (dBm) | | | |
|-------------|---------------------|----------------------------|-------------------------|-----------------------------------|------|------|------|
| IC Material | LED λ p(nm) | | | Typ. | Min. | Typ. | Max. |
| Si | 650 | 2.7~5.5 | 5.5 | -21 | - | - | -15 |



Technical Data Sheet Photolink-Fiber Optic Transmitting

DLT1112A

Package Dimensions

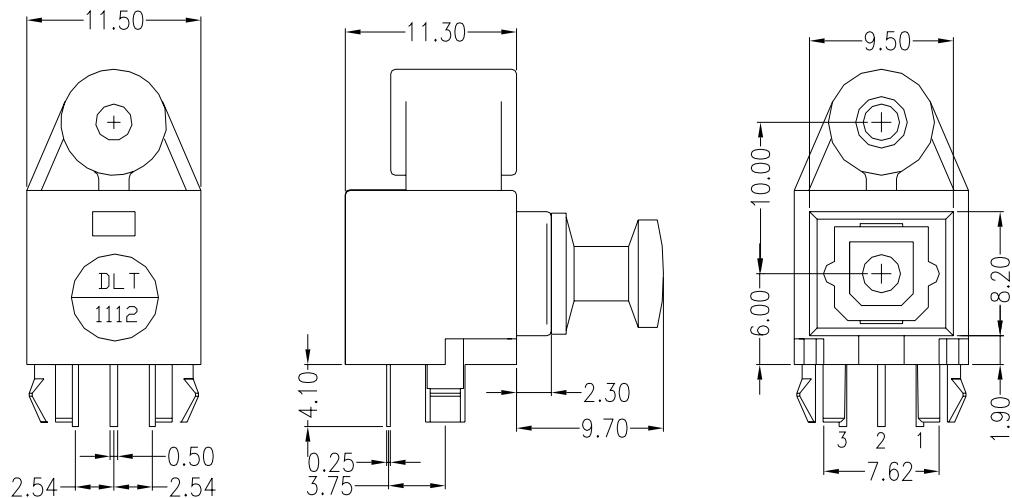


Notes: 1. All dimensions are in millimeters.

2. General Tolerance: $\pm 0.2\text{mm}$

3. Pin Function: 1.GND 2.Vcc 3.Vin

PCB Layout For Electrical Circuit

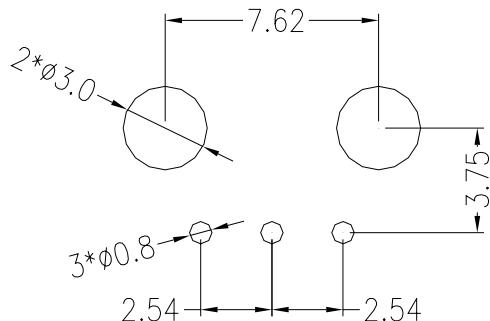

Notes:

1. Unit:mm

2. Unspecified tolerance: $\pm 0.3\text{mm}$

3. Substrate Thickness: 1.6mm



Technical Data Sheet

Photolink-Fiber Optic Transmitting

DLT1112A

Absolute Maximum Ratings(Ta = 25°C)

| Parameter | Symbol | Rating | Unit |
|-----------------------|--------|-----------------|------|
| Supply Voltage | Vcc | -0.5 to 7 | V |
| DC Input Voltage | Vin | -0.5 to Vcc+0.5 | V |
| Power Dissipation | P | 120 | mW |
| Storage Temperature | Tstg | -30 to 80 | °C |
| Operating Temperature | Topr | -20 to 70 | °C |
| Soldering Temperature | Tsol | 260* | °C |

* Soldering time \leq 5s/2times.

Electro-Optical Characteristics

| Parameter | Symbol | Conditions | MIN. | TYP. | MAX. | Unit |
|---|--------------|-------------------|------|------|------|------|
| Operating Voltage | Vcc | - | 2.7 | - | 5.5 | V |
| Peak Emission Wavelength | λ_p | - | 640 | - | 670 | nm |
| Transmission Speed | | NRZ signal | DC | - | 16 | Mbps |
| Transmission Distance | | Using APF | 0.2 | - | 20 | m |
| Pulse Width Distortion | Δt_w | 16Mbps NRZ Signal | -25 | - | 25 | ns |
| Fiber Coupling Light Output | Pf | *1 | -21 | -17 | -15 | dBm |
| Dissipation Current | Icc | *2 | - | 5 | 10 | mA |
| High Level Input Voltage | VIH | | 2 | - | - | v |
| Low Level Input Voltage | VIL | | - | - | 0.8 | v |
| Rise Time | t_r | *3 | - | 30 | 40 | ns |
| Fall Time | t_f | *3 | - | 20 | 30 | ns |
| Low \rightarrow High propagation delay time | t_{PLH} | *3 | - | - | 100 | ns |
| High \rightarrow Low propagation delay time | t_{PHL} | *3 | - | - | 100 | ns |
| Jitter | Δt_j | *3 | - | 1.5 | 15 | ns |

The DLT1112A light transmitting unit satisfies EIAJ CP-1201 digital audio interface standard.



Technical Data Sheet Photolink-Fiber Optic Transmitting **DLT1112A**

Reliability Test Items

| No. | Item | Test Condition | Test Hour/Cycle | Samples | Number (n) Failure (c) |
|-----|----------------------------|---|--|---------|---------------------------|
| 1 | Soldering Heat | 260°C±5°C | 5 sec./2times | 22 | n=22, c=0 |
| 2 | High temp. & Hum. storage | Ta=40°C, 90%RH | 500 | 22 | n=22, c=0 |
| 3 | High temp. storage | Ta=80°C | 500 | 22 | n=22, c=0 |
| 4 | Low Temp. storage | Ta=-30°C | 500 | 22 | n=22, c=0 |
| 5 | Temp. cycling | -30°C ~ 80°C (30min) (5min) (30min) | 20 | 22 | n=22, c=0 |
| 6 | High Temp. Operation life | Ta=60°C, Vcc=5V ON | 500 | 22 | n=22, c=0 |
| 7 | Repeated operation | 500 times | Coupling force < 2 kg 0.4 kg<Detaching force <2kg | 22 | n=22, c=0 |
| 8 | Terminal Strength(tension) | Weight: 500 g 30 sec./each terminal | | 22 | n=22, c=0 |
| 9 | Terminal Strength(bending) | Weight: 500 g 2 times/each terminal | | 22 | n=22, c=0 |
| 10 | Mechanical Shock | Acceleration: 1000m/s ² Pulse width: 6 ms 3 times/ X,Y,Z direction | | 22 | n=22, c=0 |
| 11 | Vibration | Frequency range: 10~55 Hz /sweep 1 min Overall amplitude:1.5mm 2H./X,Y,Z direction | | 22 | n=22, c=0 |

Icc (dissipation current): CURRENT ATTENUATE DIFFERENCE < 20%

Pf (fiber coupling light output): BRIGHTNESS ATTENUATE DIFFERENCE < 20%

TPLH (propagation L → H delay time): DELAY TIME DIFFERENCE < 20%

TPHL (propagation H→ L delay time): DELAY TIME DIFFERENCE < 20%

Tr (rise time): TIME DIFFERENCE < 20%

Tf (fall time): TIME DIFFERENCE < 20%




Technical Data Sheet Photolink-Fiber Optic Transmitting


DLT1112A

Measuring Method


- *1 Measuring method of optical output coupling fiber

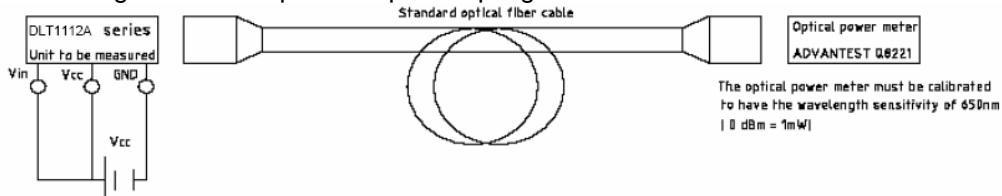

- *2 Input voltage/power dissipation measuring method

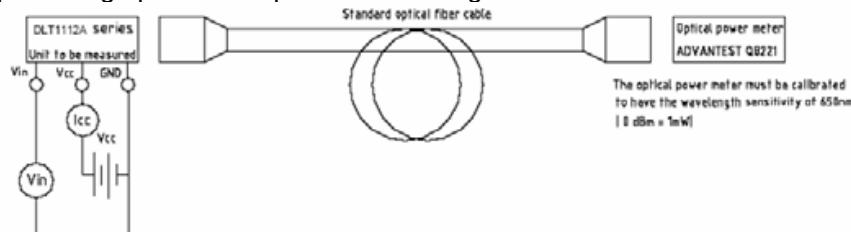

- *3 Pulse response and jitter measuring method

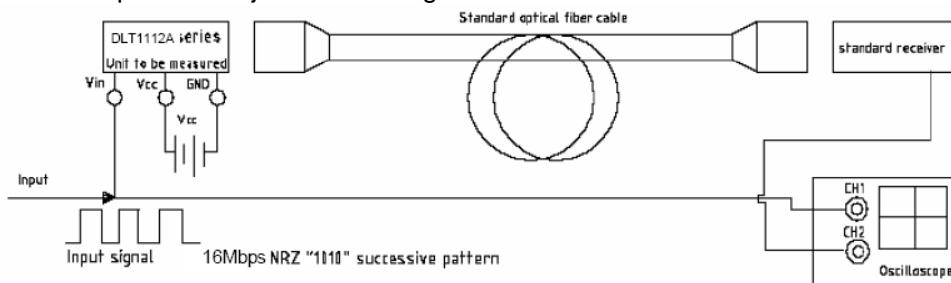

Precautions for Using Method

1. Connect a by-pass capacitor (0.1uF) close to the DLT1112A within 7 mm of the unit lead frame.
2. Take proper electrostatic-discharge (ESD) precautions while handling these devices. These devices are sensitive to ESD.
3. Please follow the conditions described in the diagram below.

