



# Jiangsu TX Plastic Optical Fibers Co., Ltd

## **Product Specifications**

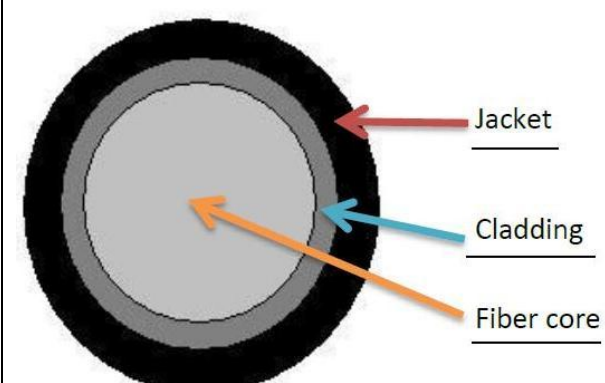
Side Glow Optic Fiber

**TX-SCC-10000/13.0T**

**Add: Unit A2, North Bali Industrial Zone, Jingang Road, Bali Town,  
Economic Development Area, Yangzhou City 225131, Jiangsu Province, China**

**Tel: +86-0514-85165888 | Fax: +86-0514-85165399**

**E-mail: [zyy@txpof.com](mailto:zyy@txpof.com) | Website: [www.txpof.com](http://www.txpof.com)**

<b>Product Data:</b>		
1. Fiber core material	MMA Polymer	
2. Cladding material	PTFE	
3. Jacket material	<b>Transparent</b> PVC	
4. Minimum bending radius	6 x diameter	
5. Wavelength range	400-700nm	
6. Interior Refractive Index	1.475	

**Specifications:**

Item		Unit	Index	Testing method
Structural Parameters	Core diameter	mm	10	JIS C 6863
	Outer diameter	mm	13	
	Cladding non-circularity	%	≤6	
	Length	m/roll	100	
Optical Properties	Attenuation	dB/km	≤700	650nm JIS C 6863
	Numerical Apertures	/	0.68	
	Attenuation (95% RH)	dB/km	300-350	
Mechanical Properties	Repeated bending (200times)	dB	Loss added ≤2	JIS C 6861
	Tensile strength	N	70	
	Twisting (5times)	dB	Loss added ≤2	
	Impacting (0.4N/meter)	dB	Loss added ≤2	

Operating temperature: - 40°C to 70°C

Recommended Storage temperature: -10°C to 35°C